


## SERVICE WICKET GATE

### EXAMPLE:

Typical 3'W x 7'H (+ 1' transom panel) service wicket shown here.

Panel configuration and quantity will vary based on gate dimensions.

Assembly instructions are specific to the size and material of your gate. See Installation Manual for complete details.

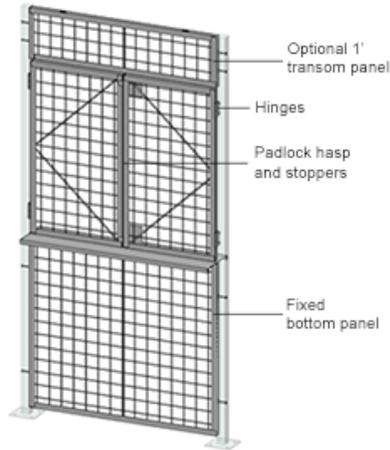

### Description

Cogan's service wicket gate acts as a service counter. The top portion of the door swings open, while the bottom portion remains fixed to restrict free access to the partition. All service wicket gates are equipped with a padlock hasp, hinges and door stoppers. Additional lock options are also available. Doors are made of 2" x 2" x 10 GA welded wire mesh framed in 1 1/4" x 1 1/4" x 12GA structural angle with two welded 1/2" ø reinforcement rods from center to the corner.

## PRODUCT INFORMATION

### Specifications

Door Heights	7' and 7' with 1' Transom
Type of Door	Service Wicket Gate
Door Stop	Installed on the door with the spring lock
Finish	Powder-coated
Mesh Size	2" x 2" x 10GA
Materials Mesh	Steel Wire
Frame Material	Structural Angle 1 1/4" x 1 1/4" x 12GA
Type of Closure	Padlock Hasp, Spring Lock
Stiffening profile	1/2" Ø Reinforcement rod


COLORS




Cogan Grey

### ORIENTATION OF GATE OPENING

Opened Outward

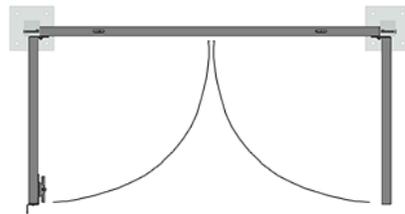

Opened Inward

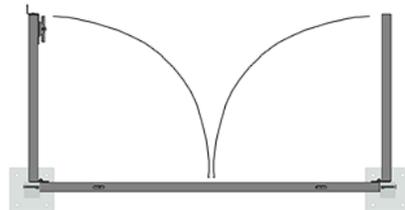


Shelf Options





**SIZES**

Please consult the table below for a complete list of dimensions.

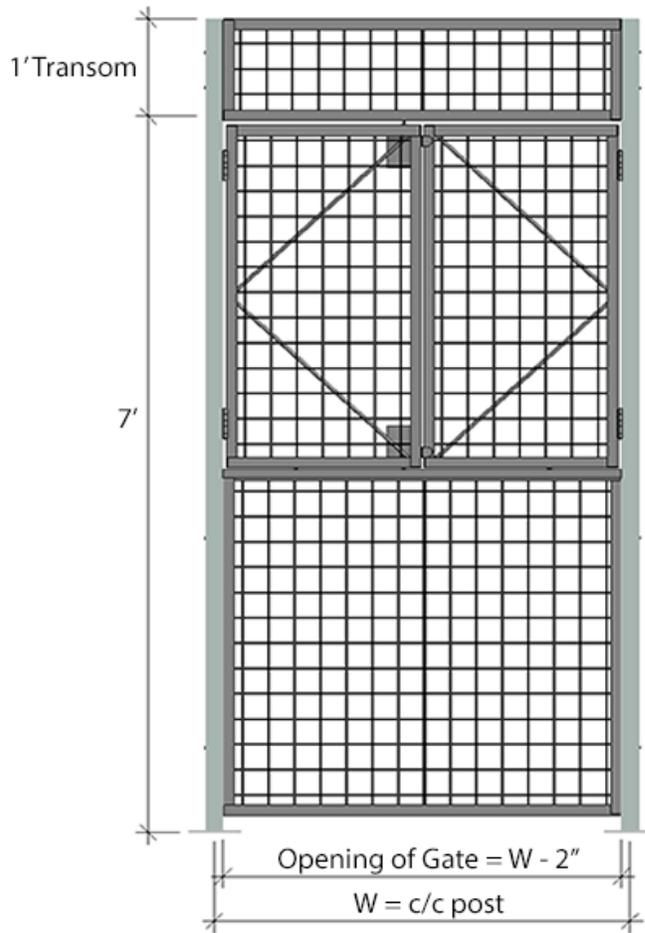

H \ W	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"
7'-0"	✓	✓	✓	✓	✓
7'-0" + 1' transom	✓	✓	✓	✓	✓

✓ Indicates gate dimension is available.

— Indicates gate dimension is **not** available.