




ORIGINAL (STRUCTURAL ANGLE) WIRE MESH PARTITION

cogan.com



POSTS - TOP FIX

Description

This partition system features floor-to-ceiling posts up to 48' high. Standard post spacing is 2' to 10' center-to-center. Custom post spacing is also available. Ideal for maximizing storage or workspace as the partition utilizes the full height of your facility. Panels are made of 2" x 2" x 10 GA welded wire mesh framed in 1 1/4" x 1 1/4" x 12GA structural angle with one or two welded Ø 1/2" Ø reinforcement rods.

PRODUCT INFORMATION

This partition system features floor-to-ceiling posts up to 48' high. Standard post spacing is 2' to 10' center-to-center. Custom post spacing is also available. Ideal for maximizing storage or workspace as the partition utilizes the full height of your facility.

Specifications

Cogan Grey

Post Height	2" x 2" Posts = 3' to 24' high, with Base Plate = 6" x 6" x 1/4"
	2" x 4" Posts = 25' to 35' high, with Base Plate = 8" x 6" x 1/2"
	2" x 6" Posts = 36' to 48' high, with Base Plate = 10" x 6" x 1/2"
Material	Hollow Structural Tubing
Finish	Powder-coated
COLORS POWDER COATED TOUGH	






cogan.com

ORIGINAL (STRUCTURAL ANGLE) WIRE MESH PARTITION

POST DETAILS

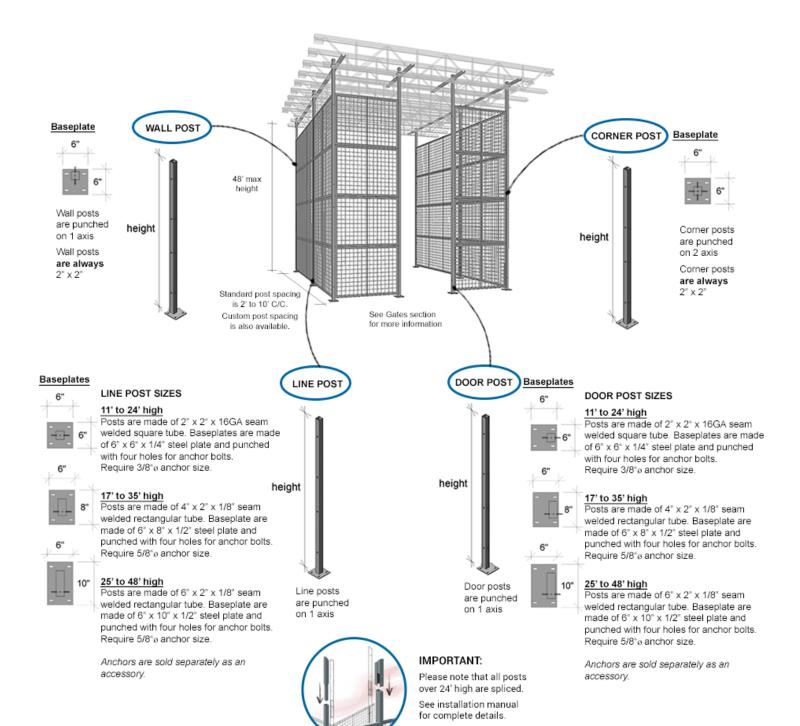






cogan.com

ORIGINAL (STRUCTURAL ANGLE) WIRE MESH PARTITION

TOP FIX BRACING TIPS

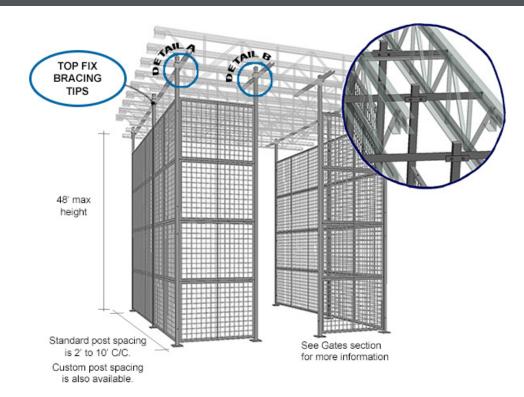

SUGGESTED INSTALLATION - PARTS IN RED ARE NOT PROVIDED BY COGAN

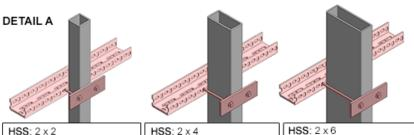


PLATE: 2" x 6" x 1/4" BOLT: Carriage bolt 1/4"ø - 3" long or Treaded rod 5/16"ø - 3" long PIPE: 1/2" STD (0.84"ø OD)

- 2 1/8" long.

HSS: 2 x 4 PLATE: 2" x 6" x 1/4" BOLT: Carriage bolt 5/16°ø - 5" long or Treaded

rod 5/16°ø - 5° long. PIPE: 1/2" STD (0.84"ø OD) - 4 1/8° long.

PLATE: 2" x 6" x 1/4" BOLT: Treaded rod 5/16*ø

- 7" long.


PIPE: 1/2" STD (0.84"ø OD) - 6 1/8° long.

PLAN VIEW Angle Post-Bolt:

DETAIL B


HSS: 2 x 2 PLATE: 2" x 6" x 1/4" BOLT: Carriage bolt 1/4°ø

- 3° long. PIPE: 1/2" STD (0.84"ø OD) - 2 1/8° long.



HSS: 2 x 4 PLATE: 2" x 8" x 1/4" BOLT: Carriage bolt 1/4°ø

- 3" long. PIPE: 1/2" STD (0.84"ø OD) - 2 1/8° long.



HSS: 2 x 6 PLATE: 2° x 10° x 1/4" BOLT: Carriage bolt 1/4°ø

- 3" long. PIPE: 1/2" STD (0.84"ø OD) - 2 1/8° long.